

Vortex Flow Meter for Data Centers

7F2C50-43K19/0

7F2C50-AAAECADAABAAASMA1+AAEAEBZ1

10



FLEx

Prowirl F 200, 7F2C50, DN50 2"

-1+

PC

☆

🗑

🕒 Delivery time: 17 wrk.day(s)



✓ Show details

7F2C50-43K19/0

7F2C50-AAAECADAABAAASMA1+AAEAEBZ1

- Digital communications** give real-time flow visibility for DCIM and automated cooling control.
- Advanced diagnostics** detect air, flashing, and two-phase flow that cause hot spots and pump issues.
- IP67/NEMA 4X housings** survive condensation, vibration, and mechanical-room environments.
- Optimized for water/glycol** with stable accuracy across variable-speed pump conditions.
- ANSI flanged design** matches standard CHW piping and simplifies maintenance in Tier III/IV facilities.

Tag: -

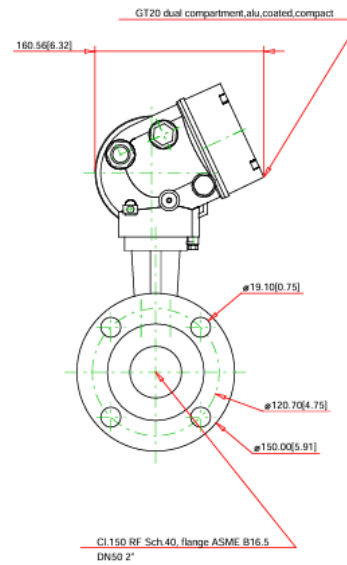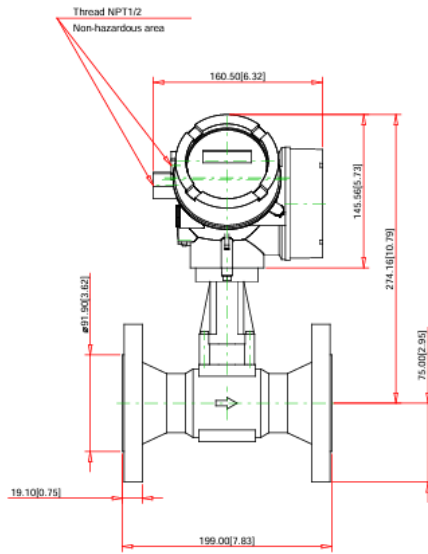

XX.X [x.xx] = mm [inch]

Disclaimer:

Every reasonable effort has been made to ensure the accuracy of the information contained in this document. Endress+Hauser does not give any guarantee, express or implied, with respect to the accuracy, the completeness or the technical or commercial usefulness of this document. Endress+Hauser may modify or replace this document at any time.

©31.08.2026 Endress+Hauser

Order Code :
7F2C50-AAECADAABAAASMA1+AAEAEBZ
1

Product Description :
Prowirl F 200, 7F2C50, DN50 2"

Endress+Hauser 

People for Process Automation

www.addresses.endress.com